

# Package Style 100

Suffix A, C, D, E, N, P




## PACKAGE INFORMATION AND DIMENSIONS

### Vertical Through-Hole Mount (Suffix N & P)

PC Layout

Front View  
Component Side

Side View






### Horizontal Through-Hole Mount (Suffix A & D)

PC Layout

Front View  
Component Side

Side View



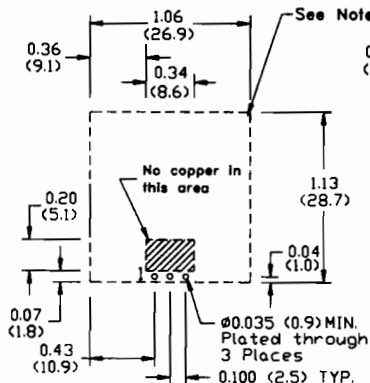


### Surface Mount (Suffix C & E)

PC Layout

Front View  
Component Side

Side View

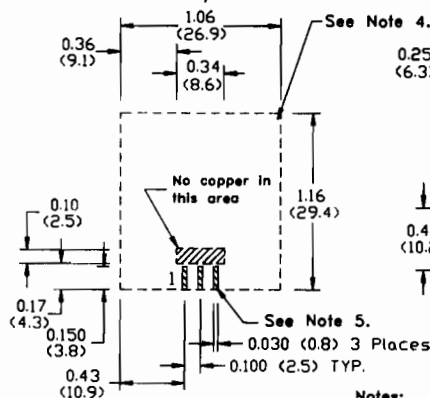

#### Notes:

- 1: All dimensions are in inches (mm).
- 2: 2 place decimals are  $\pm 0.30$  ( $\pm 0.8$ mm).
- 3: 3 place decimals are  $\pm 0.10$  ( $\pm 0.3$ mm).
- 4: Recommended mechanical keep out area.
- 5: Power pin connections should utilize two or more vias per input, ground and output pin.